



INSTALLATION INSTRUCTIONS

Part Number HA-6007

This filter fits: SEE CATALOG FOR CURRENT APPLICATIONS

Congratulations, you have purchased the finest air filter that money can buy. With proper care, this filter will last 1 million miles or more. This filter can be used in a stock machine, with no modifications required. If any engine modifications have been made tuning/jetting adjustments may be required. There are special installation instructions, so please follow the procedures outlined below to ensure the K&N Air Filter seals properly.

INSTALLATION

1. Slightly loosen the air filter locator tabs and remove the stock air filter.
CAUTION! SCREWS AND AIR FILTER LOCATOR TABS CAN FALL INTO THE THROTTLE BODY.
2. Remove the stock screws from the stock air filter. (Fig. 1)
3. Install the stock screws from the stock air filter into the provided support plate. (Fig. 2)
NOTE: THE SCREWS WILL THREAD INTO THE SUPPORT FRAME. THIS WILL KEEP THE SCREWS FROM BACKING OUT AND FALLING INTO THE THROTTLE BODY.
4. Install the provided support plate onto the K&N Air Filter. (Fig. 3)
5. Install the K&N Air Filter into the air box base making sure the air filter locator tabs are in the correct position. (Fig. 4)
6. Tighten the top two air filter screws.
7. Re-tighten the air filter locator tab screws.
8. Reinstall the air box lid.

THESE INSTRUCTIONS MUST BE FOLLOWED EVERY TIME THE FILTER IS SERVICED, OTHERWISE THE FILTER MAY NOT SEAL, AND DAMAGE TO THE ENGINE COULD RESULT.



Fig. 1

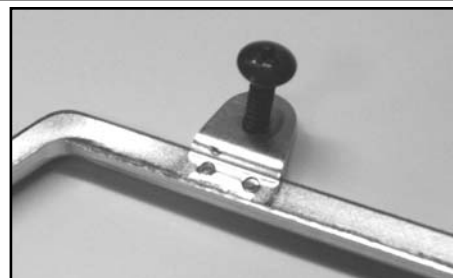


Fig. 2

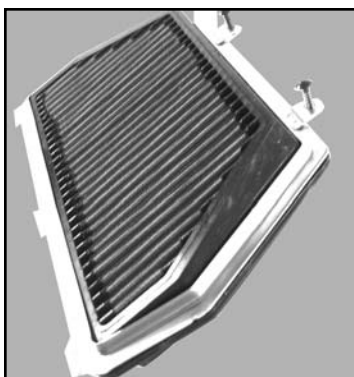


Fig. 3



Fig. 4